

KEY FEATURES


- High power handling (125 W_{AES})
- Good sensitivity (96 dB)
- Aluminium basket
- 1,5" copper voice coil
- Low harmonic distortion
- Designed for mid frequency applications
- Optimal for high quality sound reinforcement systems



TECHNICAL SPECIFICATIONS

Nominal diameter	165 mm	6,5 in
Rated impedance		8 Ω
Minimum impedance		6,3 Ω
Power capacity*		125 W _{AES}
Program power		250 W
Sensitivity	96 dB @ 1W @ Z _N	
Frequency range		140 - 8.000 Hz
Voice coil diameter	38,1 mm	1,5 in
BI factor		11,3 N/A
Moving mass		0,011 kg
Voice coil length		7,5 mm
Air gap height		6 mm

DIMENSION DRAWINGS

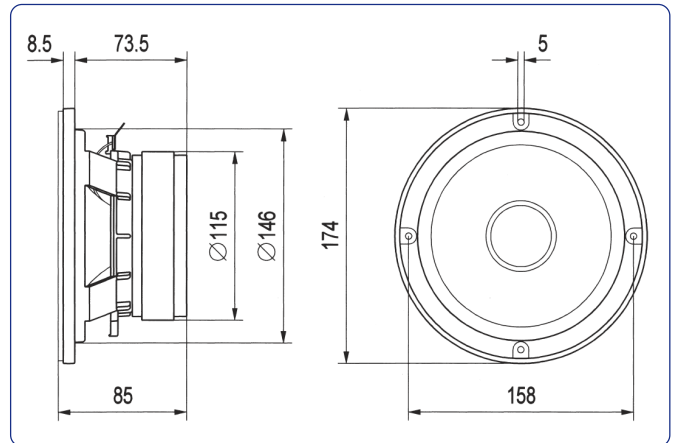

THIELE-SMALL PARAMETERS**

Resonant frequency, f _s	134 Hz
D.C. Voice coil resistance, R _e	5,7 Ω
Mechanical Quality Factor, Q _{ms}	8,4
Electrical Quality Factor, Q _{es}	0,44
Total Quality Factor, Q _{ts}	0,42
Equivalent Air Volume to C _{ms} , V _{as}	3,35 l
Mechanical Compliance, C _{ms}	121 μm / N
Mechanical Resistance, R _{ms}	1,16 kg / s
Efficiency, η ₀	1,75 %
Effective Surface Area, S _d	0,014 m ²
Maximum Displacement, X _{max} ***	2,5 mm
Displacement Volume, V _d	35 cm ³
Voice Coil Inductance, L _e	0,4 mH

MOUNTING INFORMATION

Overall diameter	174 mm	6,85 in
Bolt circle diameter	158 mm	6,22 in
Baffle cutout diameter:		
- Front mount	146 mm	5,75 in
Depth	85 mm	3,35 in
Net weight	2,2 kg	4,84 lb
Shipping weight	2,3 kg	5,05 lb


Notes:

* The power capacity is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.


** T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

*** The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.

FREE AIR IMPEDANCE CURVE

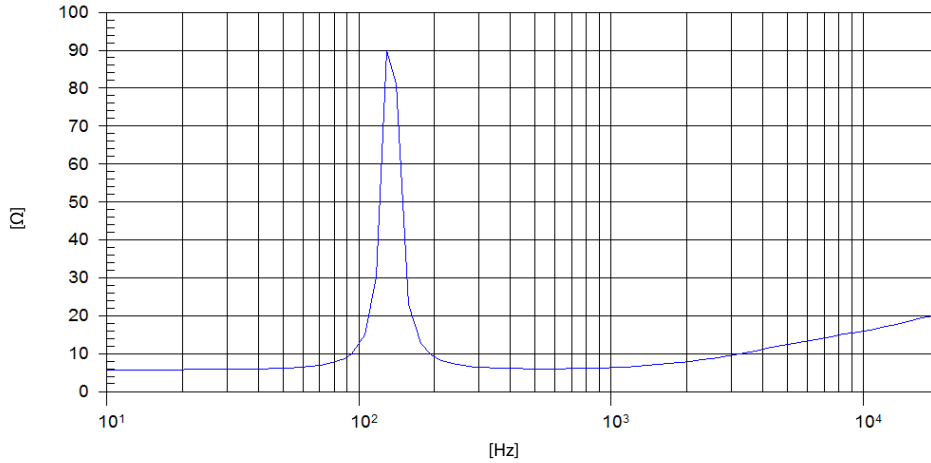

FREQUENCY RESPONSE AND DISTORTION

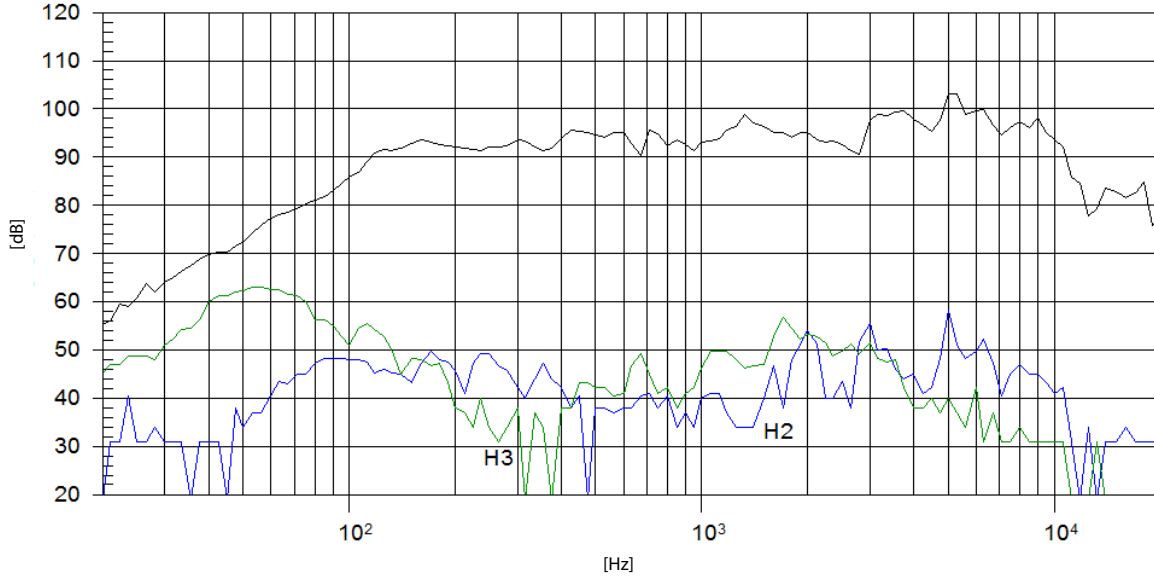

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m